


# barbee

## P50 SERIES LOW PRESSURE HAND PUMP

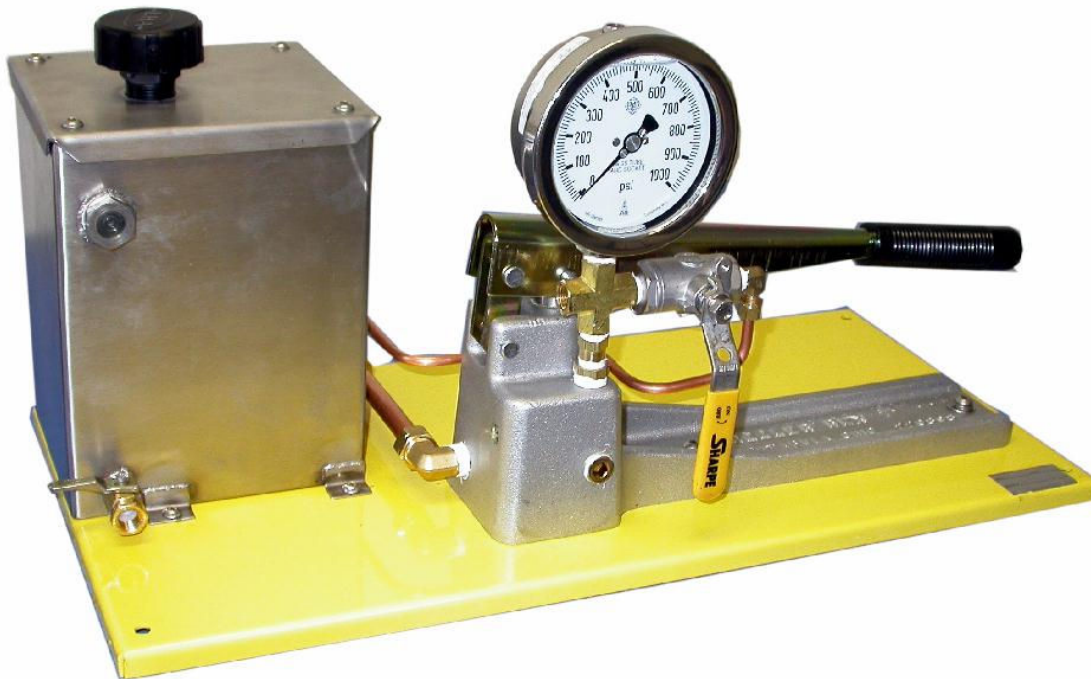

### MODEL P50-VR SHOWN ABOVE WITH OPTIONAL 1 GALLON TANK

#### FEATURES:


- Powder coated base plate .
- GAUGE MANIFOLD: 2 1/2" dial gauges with quick disconnects and extra port for relief valves optional
- Available with 1 gallon stainless steel reservoirs with vent cap and drain valve Optional
- ORDERING INFORMATION: Model P50 standard hand pump,, 0-1000 PSI

<b>PUMP TYPE &amp; PRESSURE</b>	Single acting piston type , 0-1000 PSI
<b>PRESSURE GAUGE</b>	2 1/2" dial gauges, all stainless steel, glycerin filled , 0-5000 PSI ( 4" dial optional)
<b>RELIEF VALVES (OPTIONAL)</b>	Relief Valves, 1/4" with quick disconnects, 50-350, 350-750, 750-1500
<b>HYDROSTATIC HOSE (OPTIONAL)</b>	3/8" Hose x 10 feet long, with high pressure quick disconnect x 3/8" MPT on one end.
<b>DIMENSIONS &amp; WEIGHT (-SM)</b>	12" x 23" L x 12" H, 40 lbs.

8780 Technology Way, Reno, NV 89521 619.585.8484 800.258.7848 Fax. 619.585.9996  
E Mail: [info@barbeetesters.com](mailto:info@barbeetesters.com) Web Site: [www.barbeetesters.com](http://www.barbeetesters.com)



# P50 HAND PUMP

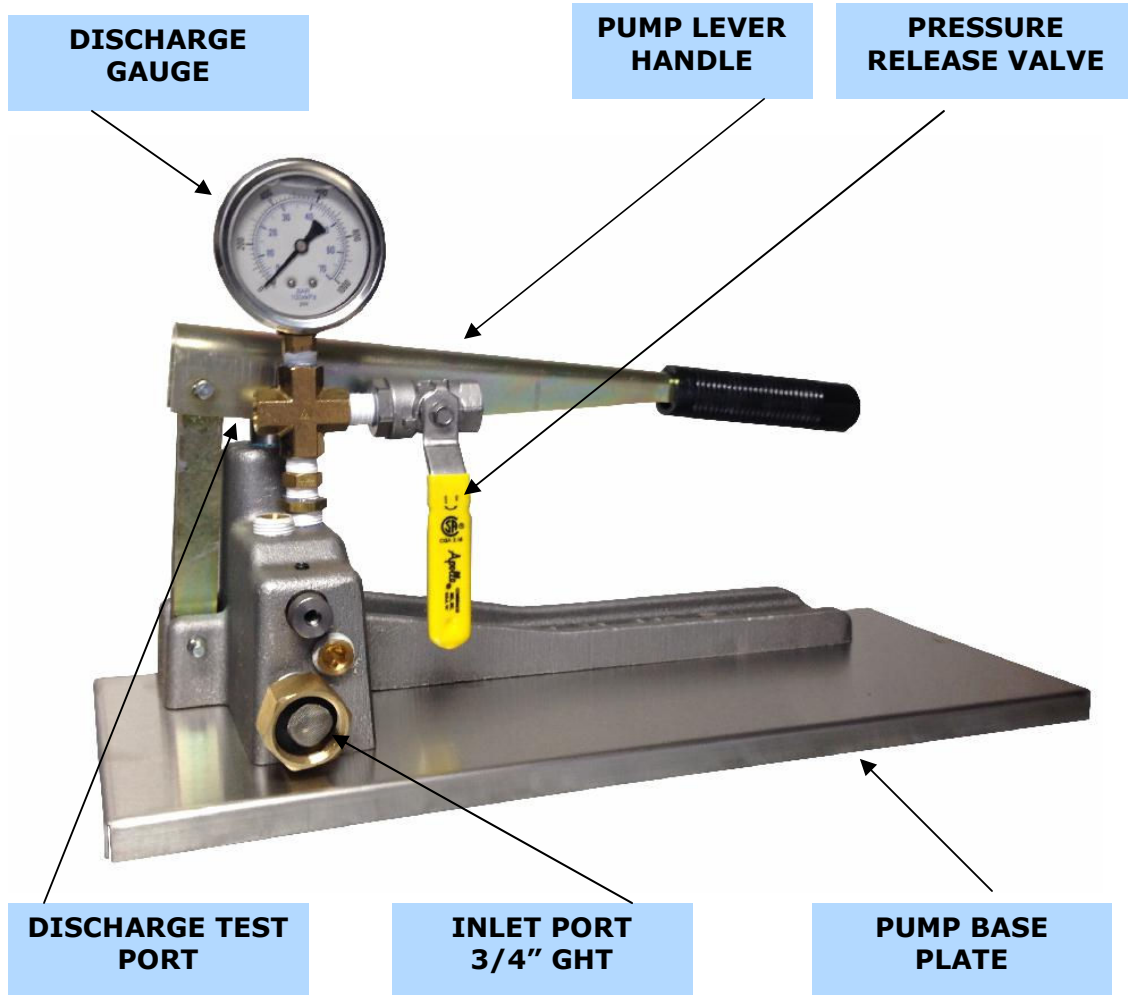

**MODEL P50 ( STANDARD MODEL )  
SHOWN IN PHOTO**

### HOSE ASSEMBLIES

**3V05-120: 10 FT. HOSE ASSY, 5000 PSI WITH QUICK DISCONNECT ON ONE END, MPT ON OTHER END.**

**3V10-120: 10 FT. HOSE ASSY. 10,000 PSI WITH QUICK DISCONNECT X MPT.**

**3V30-120: 10 FT. HOSE ASSY. 1/4" HP TUBE, CONED & THREADED WITH NUT ON EACH END, 30,000 PSI.**



### QUICK DISCONNECTS

**PHN4-4F: MALE PLUG, 1/4" FPT, PLATED STEEL PHN6-6F:**

**MALE PLUG, 3/8" FPT, PLATED STEEL**

**PHC4-4F: FEMALE SOCKET, 1/4" FPT PLATED STEEL**

**PHC6-6F: FEMALE SOCKET, 3/8" FPT PLATED STEEL**

### RELIEF VALVES



**R3A-SS-A : 1/4" MPT ANGLE SS RV 50-350 PSI**

**R3A-SS-B: 1/4" MPT ANGLE SS RV 350-750 PSI**

**R3A-SS-C: 1/4" MPT ANGLE SS RV 750-1500 PSI**

**R3A-SS-D: 1/4" MPT ANGLE SS RV 1500-2250PSI**

**R3A-SS-E: 1/4" MPT ANGLE SS RV 2250-3000 PSI**

**R3A-SS-F: 1/4" MPT ANGLE SS RV 3000-4000 PSI**

**R3A-SS-G: 1/4" MPT ANGLE SS RV 4000-5000 PSI**

**R3A-SS-H: 1/4" MPT ANGLE SS RV 5000-6000 PSI**

**HIP-10RV: 1/4" FPT STRAIGHT RV 1000-10,000 PSI**